PRESSURE GAUGE AXIAL STAINLESS STEEL CASE WITH GLYCERINE ∅50 BSP



Range (bar)	Graduation (bar)	Ref.
-1 / +1	0,05	50GA5A
0 / 1,6	0.02	50GA5D
0 / 2,5	0.05	50GA5E
0 / 4	0,1	50GA5F
0 / 6	0,1	50GA5G
0 / 10	0,2	50GA5H
0 / 16	0,2	50GA5I
0 / 25	0,5	50GA5J
0 / 40	1	50GA5K
0 / 60	1	50GA5L

1. Standards

- ✓ Manufacturer certified ISO 9001 : 2015
- ✓ Designing according to EN 837-1
- ✓ DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)
- ✓ Threaded male BSP cylindrical ends according to ISO 228-1

2. Features


Use :	Not for viscous or crystallizing liquid
Size :	Ø50
Connection :	Male 1/4" BSP
Min Temperature :	+0°C
Max Temperature :	+60°C
Pressure range :	-1/+1 Bar to 0+/60 Bars
Specifications :	Stainless steel case Bourdon brass tube Wet dial with glycerine Class 2.5
Materials :	AISI 304 case

Information provided as an indication and subject to possible modification

3. Materials

DESIGNATION	MATERIALS
Case	AISI 304
Fitting	Brass
Mechanism	
Dial	Duralumin
Glass	Plexiglass
Needle	Steel

4. Size (in mm)

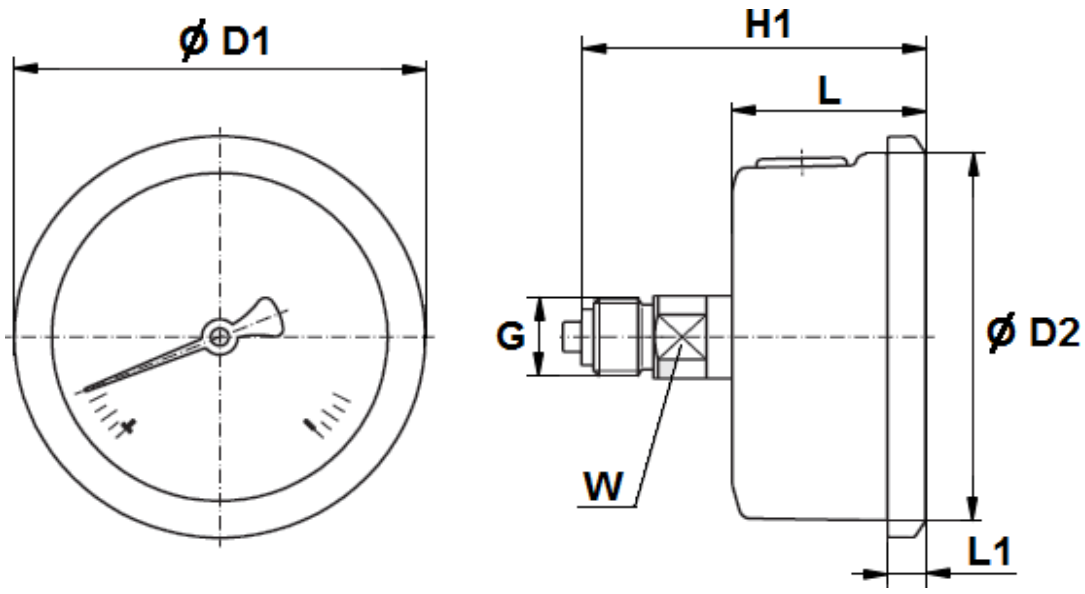

DN	∅50
L	21,8
H1	50.5
Ø D1	54,5
Ø D2	50
L1	5,5
G	1/4
W	14
Weight (kg)	0,15

Information provided as an indication and subject to possible modification