PRESSURE GAUGE AXIAL STAINLESS STEEL CASE WITH GLYCERINE ∅63 BSP

Reference(s) 50GA6*



Range (bar)	Graduation (bar)	Range (psi)	Graduation (psi)	Ref.
-1 / +1	0,05	-15/+15	0,5	50GA6A
0 / 1,6	0,02	0/23	0,5	50GA6D
0 / 2,5	0,05	0/35	0,5	50GA6E
0 / 4	0,1	0/60	1	50GA6F
0 / 6	0,1	0/90	2	50GA6G
0 / 10	0,2	0/150	2	50GA6H
0 / 16	0,2	0/230	5	50GA6I
0 / 25	0,5	0/350	5	50GA6J
0 / 40	1	0/600	10	50GA6K
0 / 60	1	0/900	20	50GA6L
0 / 100	2	0/1500	20	50GA6M
0 / 160	2	0/2300	50	50GA6N
0 / 250	5	0/3500	50	50GA6O
0 / 400	10	0/6000	100	50GA6P
0 / 600	10	0/9000	200	50GA6Q

1. Standards

- ✓ Manufacturer certified ISO 9001 : 2015
- ✓ Designing according to EN 837-1
- ✓ DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)
- ✓ Threaded male BSP cylindrical ends according to ISO 228-1

2. Features


Use :	Not for viscous or crystallizing liquid
Size :	Ø63
Connection :	Male 1/4" BSP
Min Temperature :	+0°C
Max Temperature :	+60°C
Pressure range :	-1/+1 Bar to 0+/600 Bars (-15/+15 PSI to 0/9000 PSI)
Specifications :	Stainless steel box Bourdon brass tube Wet dial with glycerine Class 1.6
Materials :	AISI 304 case

Information provided as an indication and subject to possible modification

3. Materials

DESIGNATION	MATERIALS
Cse	AISI 304
Fitting	Brass
Mechanism	
Dial	Duralumin
Glass	Plexiglass
Needle	Steel

4. Size (in mm)

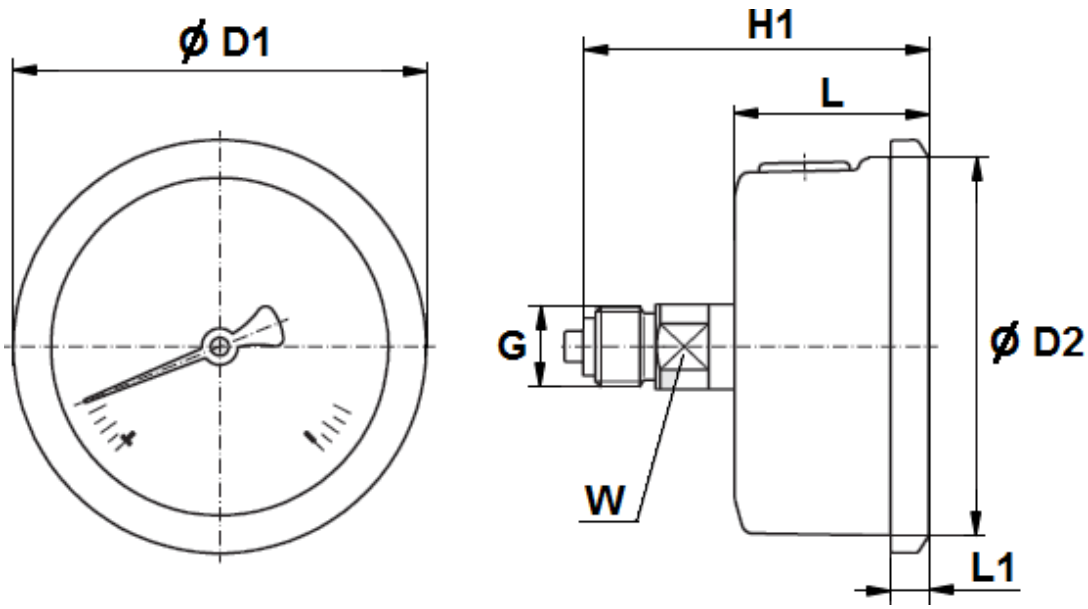

DN	∅63
L	28,7
H1	57.5
Ø D1	68
Ø D2	62
L1	6,3
G	1/4
W	14
Weight (kg)	0,25

Information provided as an indication and subject to possible modification