PRESSURE GAUGE VERTICAL STAINLESS STEEL BOX WITH GLYCERINE D.100 BSP

Reference(s) 50GR1



1. Standards

- ✓ Manufacturer certified ISO 9001 : 2015
- ✓ Designing according to EN 837-1
- ✓ DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)
- ✓ Threaded male BSP cylindrical ends according to ISO 228-1

2. Graduations

Range (bar)	Graduation (bar)	References
-1	0,05	50GR1A
0 / 1,6	0,02	50GR1D
0 / 2,5	0,05	50GR1E
0 / 4	0,1	50GR1F
0 / 6	0,1	50GR1G
0 / 10	0,2	50GR1H
0 / 16	0,2	50GR1I
0 / 25	0,5	50GR1J
0 / 40	1	50GR1K
0 / 60	1	50GR1L
0 / 100	2	50GR1M
0 / 160	2	50GR1N
0 / 250	5	50GR1P
0 / 400	5	50GR1Q
0 / 600	10	50GR1R

Information provided as an indication and subject to possible modification

PRESSURE GAUGE VERTICAL STAINLESS STEEL BOX WITH GLYCERINE D.100 BSP

Reference(s) 50GR1


3. Features

Use :	Not for viscous or crystallizing liquid Hydraulic, Compressed air and shipbuilding
Size :	Ø100
Connection :	Male 1/2" BSP
Min Temperature :	+0°C
Max Temperature :	+60°C
Max Pressure :	-1/+1 Bar to 0/+600 Bars
Specifications :	Stainless steel box Bourdon brass tube Wet dial with glycerine Class 1
Materials :	AISI 304 box

4. Materials

DESIGNATION	MATERIALS
Box	AISI 304
Fitting	Brass
Mechanism	Brass
Dial	Duralumin
Glass	Plexiglass
Needle	Duralumin

5. Size (in mm)

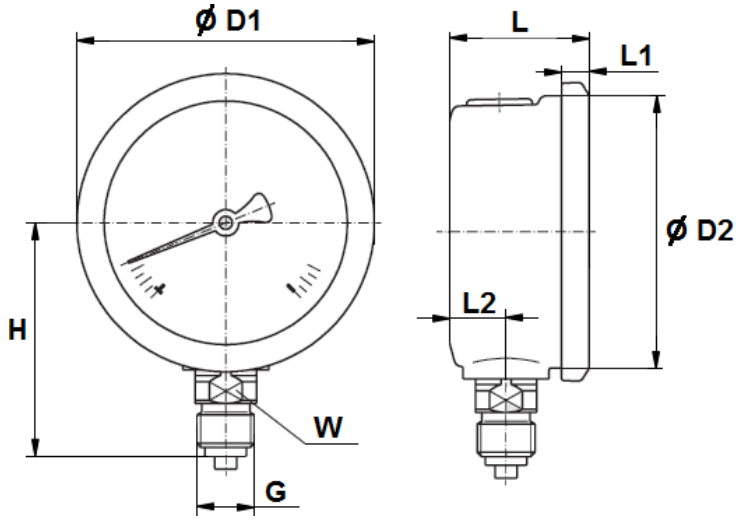

Item	Dimensions
L2	16
L	43
Ø D1	105
Ø D2	100
L1	14,5
G	1/2
H	86
W	22
Poids (kg)	0,71

Information provided as an indication and subject to possible modification