PRESSURE GAUGE VERTICAL STAINLESS STEEL BOX WITH GLYCERINE Ø50 MALE 1/4'' BSP

Reference(s) 50GR5*



Range (bar)	Graduation (bar)	Ref.
-1 / +1	0,05	50GR5A
0 / 1,6	0.02	50GR5D
0 / 2,5	0.05	50GR5E
0 / 4	0,1	50GR5F
0 / 6	0,1	50GR5G
0 / 10	0,2	50GR5H
0 / 16	0,2	50GR5I
0 / 25	0,5	50GR5J
0 / 40	1	50GR5K
0 / 60	1	50GR5L

1. Standards

- ✓ Manufacturer certified ISO 9001 : 2015
- ✓ Designing according to EN 837-1 Ref. L2 1612 10 L Ø D1 21,8 Ø D2 54,5 L1 50 5,5 G 1/4 H 48 W Weight (kg) 14 0,15
- ✓ DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)
- ✓ Threaded male BSP cylindrical ends according to ISO 228-1

2. Features


Use :	Not for viscous or crystallizing liquid
Size :	Ø50
Connection :	Male 1/4" BSP
Min Temperature :	+0°C
Max Temperature :	+60°C
Pressure range :	-1/+1 Bar to 0+/60 Bars
Specifications :	Stainless steel box Bourdon brass tube Wet dial with glycerine Class 2.5
Materials :	AISI 304 box

Information provided as an indication and subject to possible modification

3. Materials

DESIGNATION	MATERIALS
Box	AISI 304
Fitting	Brass
Mechanism	Brass
Dial	Duralumin
Glass	Plexiglass
Needle	Steel

4. Size (in mm)

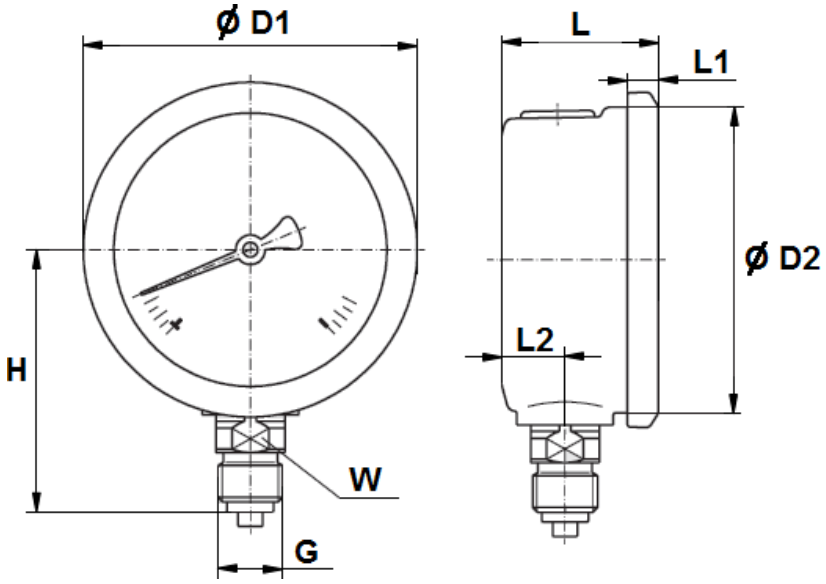

DN	50
L2	10
L	21,8
Ø D1	54,5
Ø D2	50
L1	5,5
G	1/4
H	48
W	14
Weight (kg)	0,15

Information provided as an indication and subject to possible modification