PRESSURE GAUGE ∅63 - MALE ¼'' BSP RADIAL CONNECTION

Reference(s) 50GR6*



Range (bar)	Graduation (bar)	Range (psi)	Graduation (psi)	Ref.
-1 / +1	0,05	-15/+15	0,5	50GR6A
0 / 1,6	0,02	0/23	0,5	50GR6D
0 / 2,5	0,05	0/35	0,5	50GR6E
0 / 4	0,1	0/60	1	50GR6F
0 / 6	0,1	0/90	2	50GR6G
0 / 10	0,2	0/150	2	50GR6H
0 / 16	0,2	0/230	5	50GR6I
0 / 25	0,5	0/350	5	50GR6J
0 / 40	1	0/600	10	50GR6K
0 / 60	1	0/900	20	50GR6L
0 / 100	2	0/1500	20	50GR6M
0 / 160	2	0/2300	50	50GR6N
0 / 250	5	0/3500	50	50GR6P
0 / 400	10	0/6000	100	50GR6Q
0 / 600	10	0/9000	200	50GR6R

1. Standards

- ✓ Manufacturer certified ISO 9001 : 2015
- ✓ Designing according to EN 837-1
- ✓ DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)
- ✓ Threaded male BSP cylindrical ends according to ISO 228-1

2. Features


Use :	Not for viscous or crystallizing liquid
Size :	Ø63
Connection :	Male 1/4" BSP
Min Temperature :	+0°C
Max Temperature :	+60°C
Max Pressure :	-1/+1 Bar to 0/+600 Bars (-15/+15 PSI to 0/9000 PSI)
Specifications :	Stainless steel box Bourdon brass tube Wet dial with glycerine Class 1.6
Materials :	AISI 304 box

Information provided as an indication and subject to possible modification

3. Materials

DESIGNATION	MATERIALS
Box	AISI 304
Fitting	Brass
Mechanism	Brass
Dial	Duralumin
Glass	Plexiglass
Needle	Steel

4. Size (in mm)

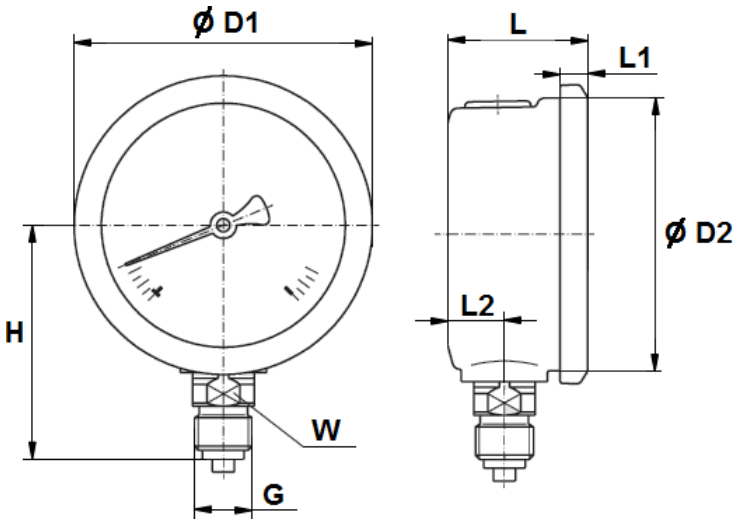

DN	63
L2	10
L	28,7
Ø D1	68
Ø D2	62
L1	6,3
G	1/4
H	55
W	14
Weight (kg)	0,25

Information provided as an indication and subject to possible modification