RADIAL BI-METALLIC STAINLESS STEEL THERMOMETER D100 PLUNGER 77

Reference(s) 51MRC*



Range (°C)	Reference
-30°C +50°C	51MRC10
0 +120°C	51MRC50
0 +160°C	51MRC60
0 +200°C	51MRC70

1. Standards

- ✓ Manufacturer certified **ISO 9001 : 2015**
- ✓ Designing according to **EN 13190**
- ✓ DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)

2. Caractéristiques


Use :	Not for viscous or crystallizing liquid
Size :	Ø 100
Connection :	Mâle 1/2" BSP
Temperature range :	-30°C / +50°C (51MRC10) 0 / +120°C (51MRC50) 0 / +160°C (51MRC60) 0 / +200°C (51MRC70)
Max pressure :	40 Bars
Specifications :	Full stainless steel Bimetallic mechanism Accuracy class 2 Instrument glass
Material :	Stainless steel AISI 304


3. Materials

Designation	Materials
Box	Stainless steel AISI 304
Fitting	
Mechanism	
Dial	Duralumin
Glass	Instrument glass
Needle	Duralumin

Information provided as an indication and subject to possible modification


4. Size (in mm)

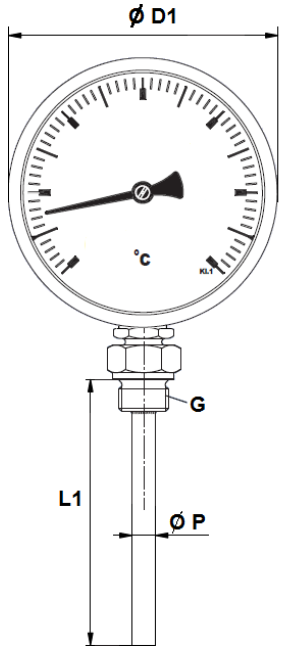

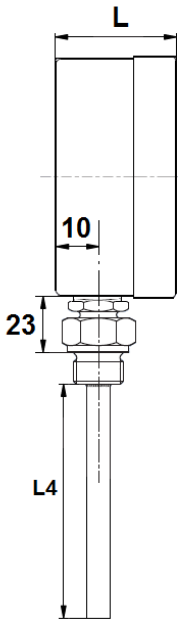

DN	
Ø D1	109
L	50
L1	77
L4	63
G	1/2"
Ø P	8
Weight (kg)	0.31

Stainless steel thermowells size (in mm) :

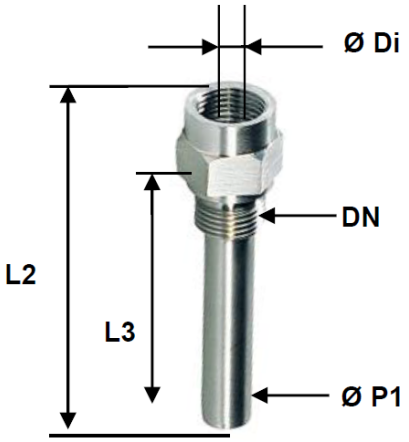

Ref.	A51DOII
DN	1/2"
L2	90
L3	65
Ø Di	11
Ø P1	14
Weight (Kg)	0,11

Information provided as an indication and subject to possible modification