CONTROLABLE BRASS SAFETY RELIEF VALVE PN16 DN3/8" TO 2"

Reference(s) 70TL1M0



1. Standards


- ✓ Gas connection according to ISO 228-1.
- ✓ Test procedures are performed according to EN 12266-1, DIN 3230, BS 5154 and ISO 5208: 24 bar body

2. Features

Use :	compressed air.
Size :	3/8" to 2"
Connection :	Male BSP
Min Temperature :	0°C
Max Temperature :	180°C
Max Pressure :	16 bar
Specifications :	PTFE sealing Adjustment range from 2 to 12 bar
Materials :	Brass body

3. Materials & dimensions

Item	Description	Material
7	Lock nut	Brass
6	Control nut	Brass
5	Spring	Cadmium plated steel
4	Poussoir	Brass
3	Disc	Brass
2	Seat	Brass
1	Body	Brass

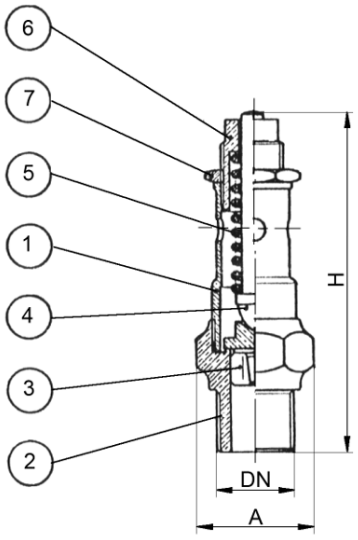

DN		A	H	Poids (kg)
mm	inch			
10	3/8”	26	91	0.155
15	1/2”	28	94	0.160
20	3/4”	40	118	0.375
25	1”	49	128	0.525
32	1” 1/4	62	145	1.040
40	1” 1/2	68	155	1.350
50	2”	79	190	2.020

Ref. A70TTARAGE : Pre-setting without certificate

Information provided as an indication and subject to possible modification