BRASS Y STRAINER FEMALE BSP ACS 4MS

Reference(s)
72SL1F0
72SL0F0



References	Working pressure	∅ DN							
		3/8''	½''	¾''	1''	1''1/4	1''1/2	2''	2''1/2
72SL1F0	16 bar	●	●	●	●	●	●	●	
72SL0F0	10 bar								●

1. Standards


- ✓ Manufacturer certified ISO 9001 :2015
- ✓ DIRECTIVE 2014/68/EU : Products excluded from directive (Article 1, § 2.b)
- ✓ French water agreement **A.C.S. N° 21 ACC LY 404**
- ✓ Threaded female BSP cylindrical according to ISO 228-1

2. Features

Use :	Water distribution and watering
Size :	DN3/8" to DN2"1/2
Connection :	Female BSP
Min Temperature :	-10°C
Max Temperature :	+120°C
Max Pressure :	16 Bars up to DN2"
Specifications :	For drinking water (ACS) Removable stainless steel filter Mesh 850µ Vertical or Horizontal position
Materials :	Brass body CW617N-4MS according to EN12165

Information provided as an indication and subject to possible modification


3. Materials

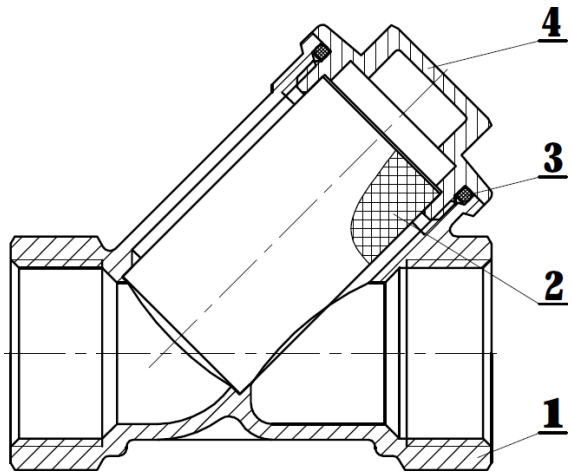


Item	Designation	Materials
1	Body from DN3/8" to DN2"	Brass CW617N-4MS according to EN 12165
1	Body DN2"1/2	Brass CW617N according to EN 12165
2	Filter	AISI 304
3	O ring	EPDM
4	Cap from DN3/8" to DN2"	Brass CW617N-4MS according to EN 12165
5	Cap DN2"1/2	Brass CW617N according to EN 12165


4. Size (in mm)

Filter size

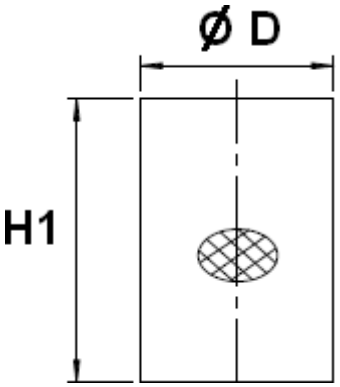

DN	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2
Ø P	12	15.6	20	26	32	42	50	60
L	48	58	68	75	90	108	130	150
L1	9	11	13	14	16.5	18	20	20
Ø B	M18x1.5	M22.5x1.5	M28.5x1.5	M33x1.5	M38.5x1.5	M47.5x1.5	M58x1.5	M72x1.5
H	22	23.5	33.3	38	42	49.5	61	75.3
W	20	25	31	38	47	54	67	84
Ø D	14.5	18.5	23.5	27.5	33.5	42.5	52.5	65
H1	22	25	40	40.5	46	54	63	83
Weight (Kg)	0.074	0.135	0.215	0.335	0.475	0.770	1.280	2.100

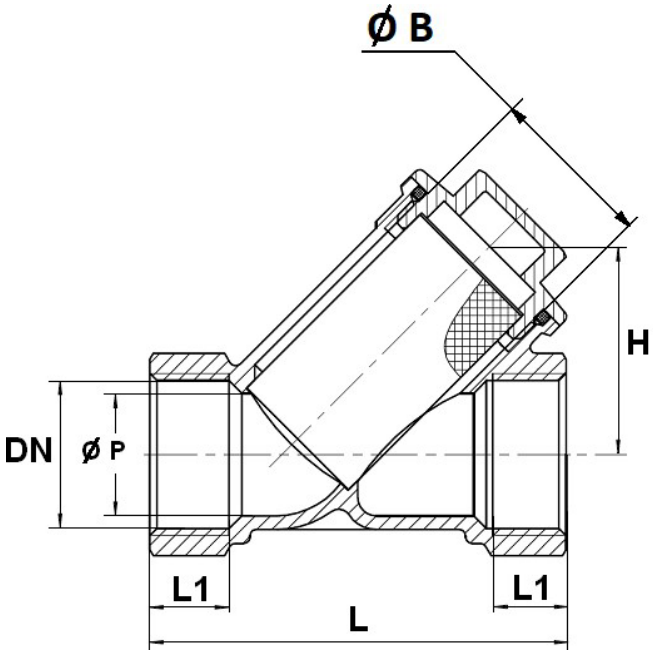


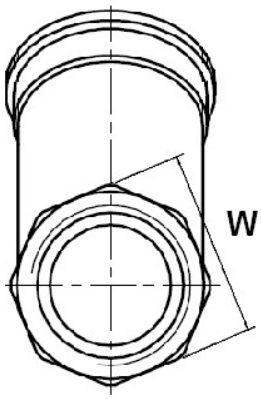


Information provided as an indication and subject to possible modification

5. Installation positions

Vertical position (descendand fluid)

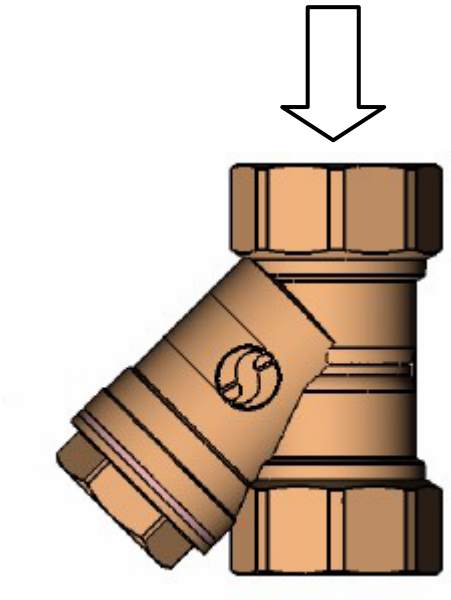

Horizontal position

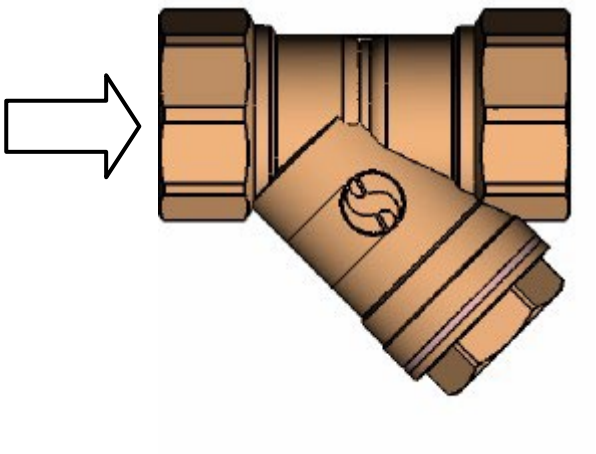

Information provided as an indication and subject to possible modification